



PIEDRA stone collections



MADERA wood collectio



OPERA opus collecti



FIORA flowery collection

BESPOKE customization



RECREATE THE BEAUTY OF ELEMENTS

Offering sustainable surface solutions with eco-friendly materials developed from the essence of woods, stones and other man-made materials to maintain the beauty as much as the element where the idea was extracted from.









OPERA

opus collections

By definition, an opus is a created work by man, usually of an artistic kind. It is creative and beautiful – a definite work of art to the eye of the beholder.

Cocorosa introduces opus, inspired by man-made materials in the architecture world. Opus tiles provides infinite possibilities to the diserning when it comes to beautiful, modern spaces.

Its range of versatile, neutral hues also aims to delight

The senses.






























































































































OPERA SITE
Graphite SITE OF


OPERA SITE
Ash site 02

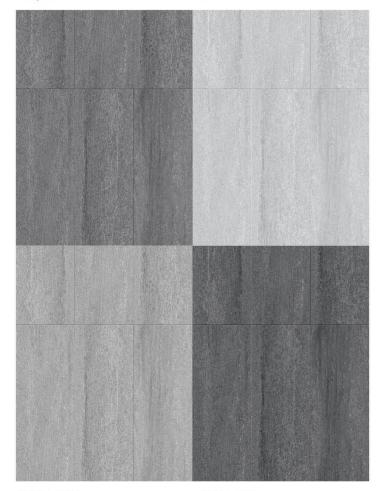

OPERA SITE
Cinder SITE OS

OPERA SITE
Coal SITE 04

SPECIAL PIECES

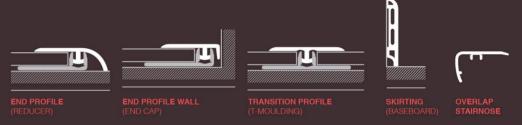

SMART SELECT LUXURY VINYL FLOORING LIMITED WARRANTY PERIODS

Thickness	Core	Wear layer	Attached pad	Res	idential Warranty	L. Commercial Warranty				
3.2 mm	Rigid Core	8 mil (0.2mm)	Y/N	10 y	ears	5 years				
3.2 mm	Rigid Core	12 mil (0.3mm)	Y/N	15 y	ears	7 years				
4 mm	Rigid Core	12 mil (0.3mm)	Y/N	20 y	ears	8 years				
5 mm	Rigid Core	20 mil (0.5mm)	Y/N	Limi	ted Lifetime	10 years				
Definitions for applications in terms of LVT										
RESIDENTIAL		LIGHT COMMERCIAL		COMMERCIAL						
Kitchen		Small restaurant		Large restaurant						
Dining room		Small retail shop		Large retail, large office						
Bedroom		Waiting rooms			Hair salon (working area)					
Bathroom		Trade booths		School classroom						
Recreation rooms, foyers		Small Office			Nurses Station					

*Residential use, or household conditions means the daily activities commonly associated with residential use.

*Light commercial is defined as environments which do not have heavy commercial traffic, where the flooring is not exposed to a heavy commercial maintenance schedule and where the interior temperature and humidify can be controlled and maintained.

*Commercial is defined as environments which have heavy commercial traffic.

TECHNICAL SPECIFICATIONS

Clasification	Test Standard	Result
Reaction to fire	EN ISO 9239-1	B fl – s1
Impact Insulation Class	ASTM E492-09	52
Sound Transmission Class	ASTM E90-09	54
Determination the content of formaldehyde	ISO 16000-3	A+
Performance	Test Standard	Result
Wear resistance	EN660-1	Group T
Residual indentation after static load	EN436	Pass
Dimensional stability and curling after exposure to heat	EN434	Pass
Flexibility	EN435	Pass
Measurement of dynamic coefficient of friction on dry floor surface	E13893	Pass
Slip resistance	DIN 51130	R10
Resilience to chemicals	EN423	Class 0

FORMATS & RANDOMNESS

LVT Click LVT Sintered Core SPC Rigid Core	INCHES MM FACES	12"X24" 305x610 3	18"X36" * 460X935 2	18"X48" ★ 460X1220 2	:	:
LVT Glue Down LVT Loose Lay	INCHES MM FACES	12"X24" 304.8X609.6 3	18"X36" * 457.2X914.4 2	18"X18" 457.2X457.2 4	12"X24" 609.6X609.6 4	36"X36" 914.4X914.4 1

^{*} non-standard formats/size, production upon request/order

