





MADERA wood collections



OPERA opus collect



FIORA flowery collection



RECREATE THE BEAUTY OF ELEMENTS

Offering sustainable surface solutions with eco-friendly materials developed from the essence of woods, stones and other man-made materials to maintain the beauty as much as the element where the idea was extracted from.







PIEDRA

stone collections

Whether you are a true believer in the green movement or you're just passionate in bringing the beauty of nature into your home, there's no denying the appeal of natural materials in interior design.

PIEDRA, a beautiful collection inspired by natural stone. Gorgeous and extremely durable, stone-look tile is definitely a smart choice for floors and walls, and very easy to take care of as well. With its fine variety of modern designs and sizes, PIEDRA is sure to add an elegant touch to any décor scheme.
































PIEDRA LIMOS





SPECIAL PIECES

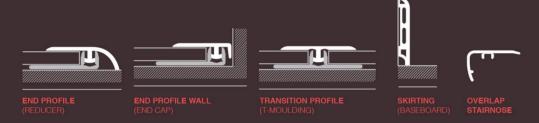

SMART SELECT LUXURY VINYL FLOORING LIMITED WARRANTY PERIODS

Thickness	Core	Wear layer	Attached pad	Res	idential Warranty	L. Commercial Warranty				
3.2 mm	Rigid Core	8 mil (0.2mm)	Y/N	10 y	ears	5 years				
3.2 mm	Rigid Core	12 mil (0.3mm)	Y/N	15 y	ears	7 years				
4 mm	Rigid Core	12 mil (0.3mm)	Y/N	20 y	ears	8 years				
5 mm	Rigid Core	20 mil (0.5mm)	Y/N	Limited Lifetime		10 years				
Definitions for applications in terms of LVT										
RESIDENTIAL		LIGHT COMMERCIAL			COMMERCIAL					
Kitchen		Small restaurant			Large restaurant					
Dining room		Small retail shop			Large retail, large office					
Bedroom		Waiting rooms			Hair salon (working area)					
Bathroom		Trade booths			School classroom					
Recreation rooms, foyers		Small Office			Nurses Station					

^{*}Residential use, or household conditions means the daily activities commonly associated with residential use.

TECHNICAL SPECIFICATIONS

Clasification	Test Standard	Result	
Reaction to fire	EN ISO 9239-1	B fl - s1	
Impact Insulation Class	ASTM E492-09	52	
Sound Transmission Class	ASTM E90-09	54	
Determination the content of formaldehyde	ISO 16000-3	A+	
Performance	Test Standard	Result	
Wear resistance	EN660-1	Group T	
Residual indentation after static load	EN436	Pass	
Dimensional stability and curling after exposure to heat	EN434	Pass	
Flexibility	EN435	Pass	
Measurement of dynamic coefficient of friction on dry floor surface	E13893	Pass	
Slip resistance	DIN 51130	R10	
Resilience to chemicals	EN423	Class 0	

FORMATS & RANDOMNESS

LVT Click LVT Sintered Core SPC Rigid Core	INCHES MM FACES	12"X24" 305x610 3	18"X36" * 460X935 2	18"X48" * 460X1220 2	5 - -	
LVT Glue Down LVT Loose Lay	INCHES MM FACES	12"X24" 304.8X609.6 3	18"X36" * 457.2X914.4 2	18"X18" 457.2X457.2 4	12"X24" 609.6X609.6 4	36"X36" 914.4X914.4 1

^{*} non-standard formats/size, production upon request/order

^{*}Light commercial is defined as environments which do not have heavy commercial traffic, where the flooring is not exposed to a heavy commercial maintenance schedule and where the interior temperature and humidify can be controlled and maintained.

^{*}Commercial is defined as environments which have heavy commercial traffic.



email info@cocorosasurfaces.com phone +86 0757 8252 5005

www.cocorosasurfaces.com