



NATURALIS COLLECTIONS





NATURALIS COLLECTIONS

WHETHER YOU ARE A TRUE BELIEVER IN THE GREEN MOVEMENT OR
YOU'RE JUST PASSIONATE IN BRINGING THE BEAUTY OF NATURE INTO
YOUR HOME, THERE'S NO DENYING THE APPEAL OF NATURAL
MATERIALS IN INTERIOR DESIGN.

NATURALIS, A BEAUTIFUL COLLECTION OF PORCELAIN TILE DESIGNS
INSPIRED BY NATURAL STONE. GORGEOUS AND EXTREMELY DURABLE,
STONE-LOOK TILE IS DEFINITELY A SMART CHOICE FOR FLOORS AND
WALLS, AND VERY EASY TO TAKE CARE OF AS WELL. WITH ITS FINE
VARIETY OF MODERN DESIGNS AND SIZES, NATURALIS IS SURE TO ADD
AN ELEGANT TOUCH TO ANY DÉCOR SCHEME.


BY WIFI CERAMIC




OLGA PRESENTS THE FINE LOOK OF SANDSTONE WITH THE
PRACTICALITY OF PORCELAIN TILE. THIS STUNNING SERIES
ACCURATELY REPLICATES THE VEINING AND SPECKLES OF NATURAL
SANDSTONE WHICH ADDS WARMTH AND SOPHISTICATION TO
ANY SETTING.


AVAILABLE IN THREE NEUTRAL COLOURS, SIZES AND SURFACES,
OLGA IS ABLE TO INTEGRATE EASILY WITH EXISTING OR FUTURE
DÉCOR SCHEMES. WHAT'S MORE, ITS NON-POROUS AND
HARDWEARING QUALITIES MAKES OLGA A GREAT LONG-TERM
INVESTMENT FOR PROPERTY OWNERS EVERYWHERE.

BY WIFI CERAMICS

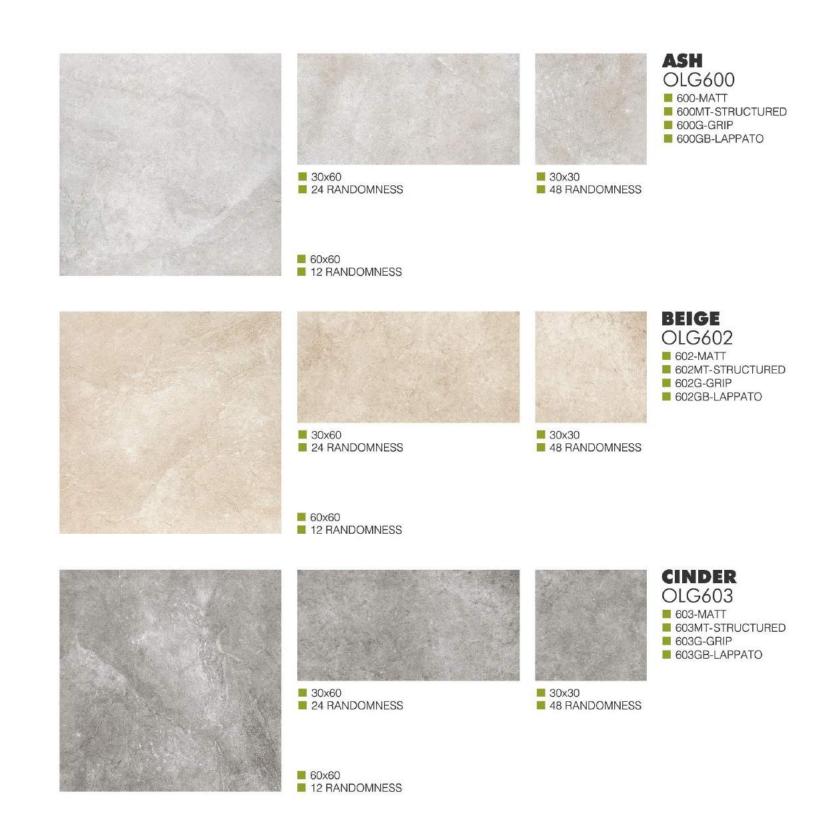

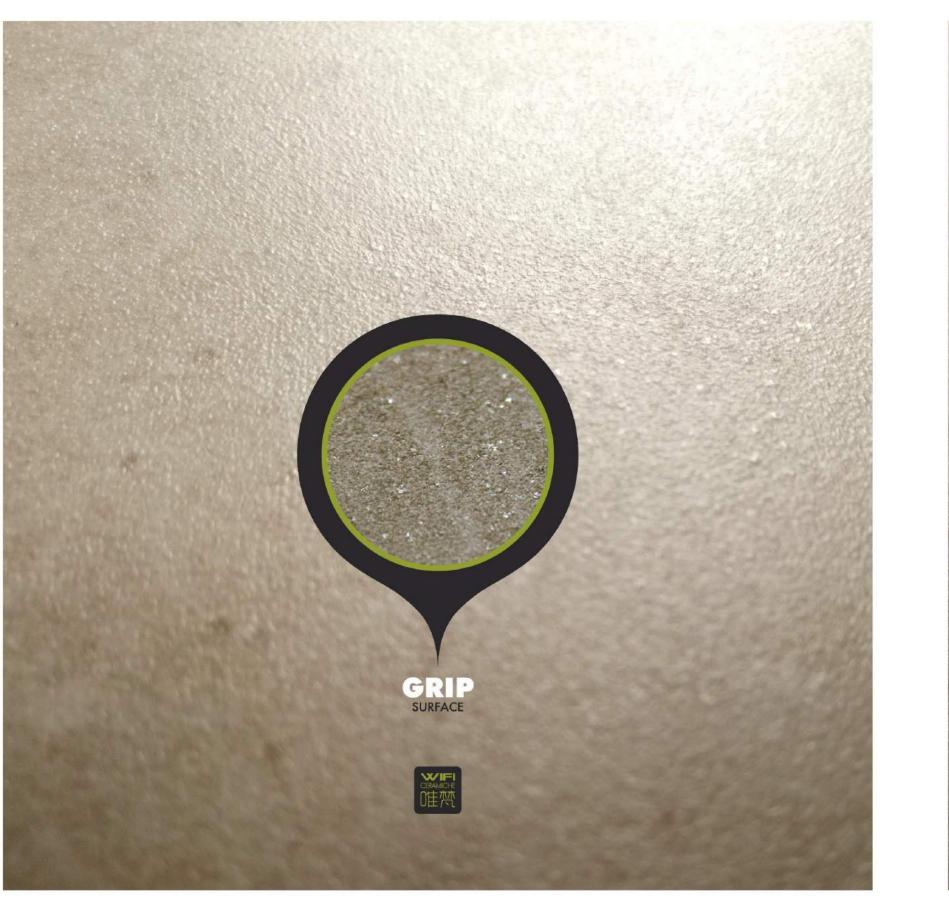



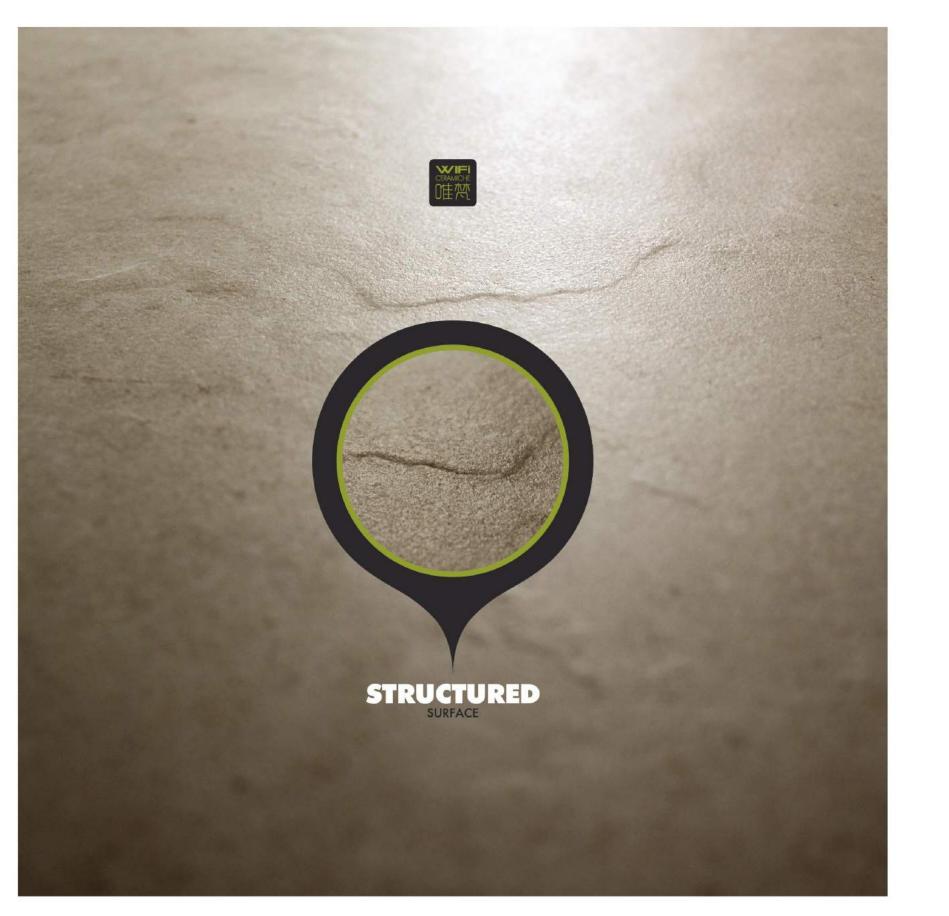







ASH OLG600

Ash offers an urban vibe yet it remains soothing to the eye. It is neither loud nor dramatic but has an understated grey colour that suits most interior schemes.

- OLG600 MATTOLG600MT STRUCTUREDOLG600G GRIPOLG600GB LAPPATO
- 60x60 | 12 RANDOMNESS
 60x30 | 24 RANDOMNESS
 30x30 | 48 RANDOMNESS









ASH OLG600

Inspired by the deserts of North west Africa and the Siberian Peninsula, Beige is and will remain a classic colour choice for any spatial styling.

- OLG600 MATTOLG600MT STRUCTUREDOLG600G GRIPOLG600GB LAPPATO

- 60x60 | 12 RANDOMNESS 60x30 | 24 RANDOMNESS 30x30 | 48 RANDOMNESS









BEIGE OLG602


The epitome of refinement, Beige can give you the graceful element you need for your furnishings to stand out in a room while also offering a subtle contemporary vibe.

- OLG602 MATTOLG602MT STRUCTUREDOLG602G GRIPOLG602GB LAPPATO

- 60x60 | 12 RANDOMNESS60x30 | 24 RANDOMNESS30x30 | 48 RANDOMNESS





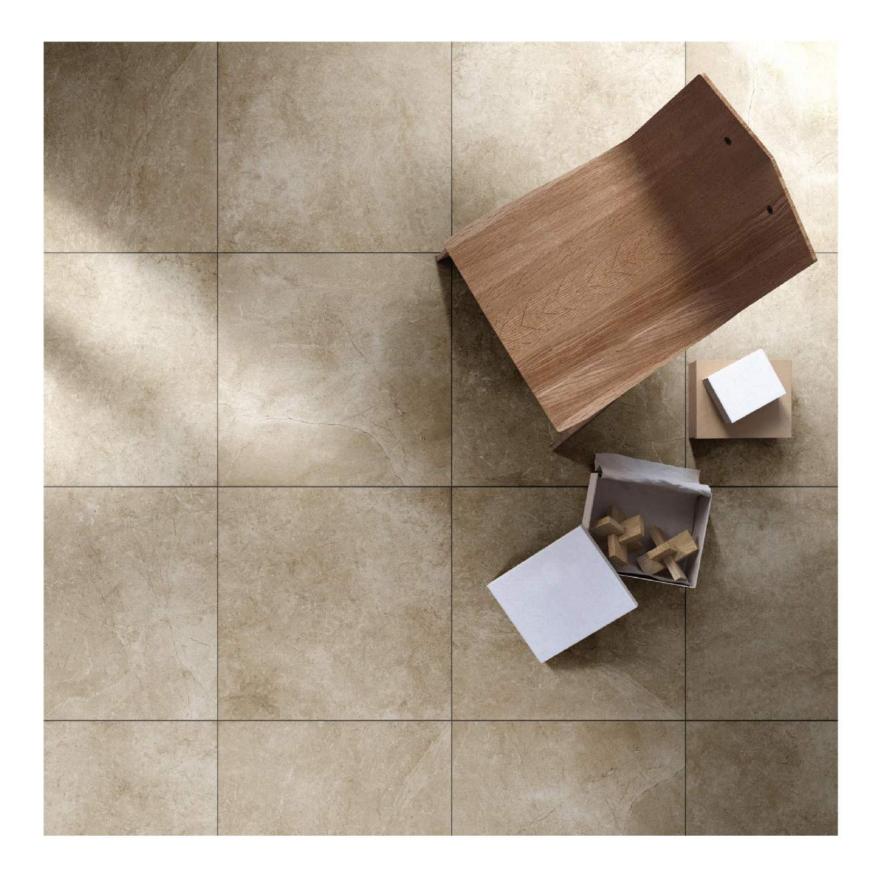




BEIGE OLG602

Beige certainly lifts the mood and adds warmth to spaces whether they be a poolside terrace or a dining area.

- OLG602 MATTOLG602MT STRUCTUREDOLG602G GRIPOLG602GB LAPPATO

- 60x60 | 12 RANDOMNESS 60x30 | 24 RANDOMNESS 30x30 | 48 RANDOMNESS

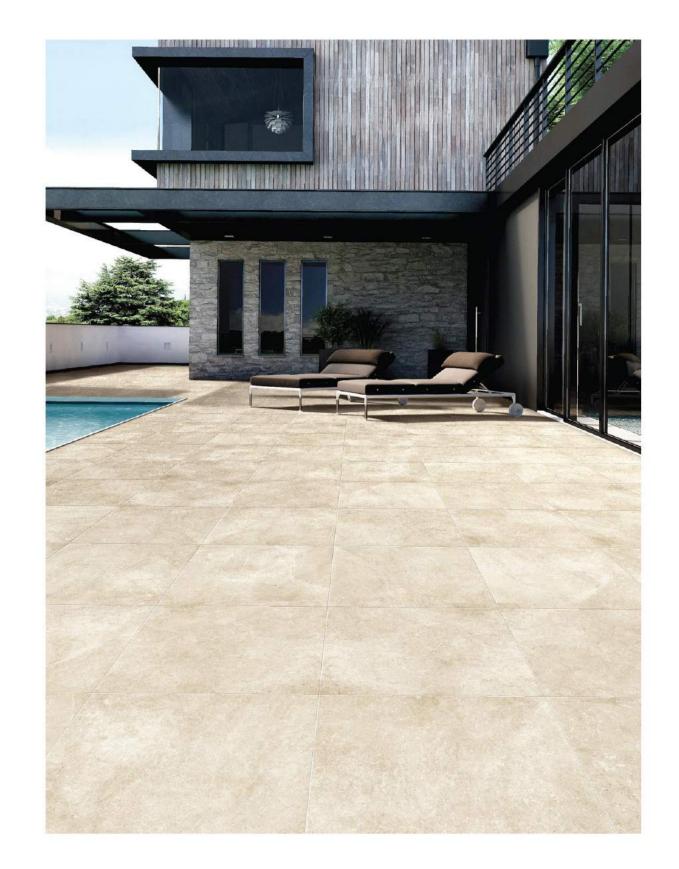







CINDER OLG603

Cinder's uber-cool look brings to mind industrial settings and metropolitan skylines – a refreshing grey hue that will certainly jazz up your floors.

- OLG603 MATTOLG603MT STRUCTUREDOLG603G GRIPOLG603GB LAPPATO

- 60x60 | 12 RANDOMNESS 60x30 | 24 RANDOMNESS 30x30 | 48 RANDOMNESS









CINDER OLG603

Cinder actually has quite a versatile character. It can appear cool in minimalist schemes yet inviting in shabby-chic interiors.

- OLG603 MATTOLG603MT STRUCTUREDOLG603G GRIPOLG603GB LAPPATO

- 60x60 | 12 RANDOMNESS 60x30 | 24 RANDOMNESS 30x30 | 48 RANDOMNESS






INSTALLATION TIPS

- O1 Inspect all product prior to installation for any visible defects or unacceptable colour/shade variation. Claims are not accepted after installation.
- 02 A 1/4" square-notched trowel is suggested for applying the thin-set.
- 03 Before grouting, allow the mortar base to dry for 24 to 48 hours
- O4 The tiles can be cleaned with clear water and/or a neutral liquid cleaner. Apply the cleaning solution to the properly installed tile using a cloth mop or non-abrasive towel. Follow the application with a clear water rinse and wipe dry to prevent film formation.
- O5 Sealing the tile is not recommanded, and acid cleaning the tile may result in substantial harm to the product; therefore if either of these applications are performed it will specifically void the warranty.
- 06 INSTALLATION OF RECTANGULAR TILES:

Staggered space should be kept within 10cm to 15cm (For 10cm X 60cm, 15cm X 60cm, 20cm X60cm, 30cm X 60cm, and 47cm X120cm rectangular tiles to compensate for the warpage of rectangular tiles.

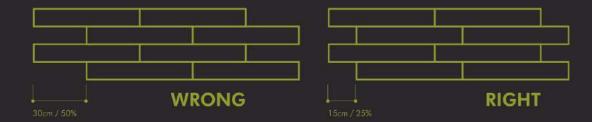



TECHINICAL SPECIFICATIONS

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	ISO STANDARD REQUIREMENT	W IFi
Length & Width	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Thickness	ISO 10545 - 2	mrn	± 5.0% Max	±5.0% Max
Sides Straightness	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Rectangularity	ISO 10545 - 2		± 0.6% Max	± 0.6% Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpege	ISO 10545 - 2 ISO 10545 - 2 ISO 10545 - 2		± 0.5% Max ± 0.5% Max ± 0.5% Max	± 0.5% Max ± 0.5% Max ± 0.5% Max
Surface Quality	ISO 10545 - 2	One major area of tiles		≥ 95% free from visible defect
Water Absorption	ISO 10545 - 3			≤ 0.5%
Modulus of Rupture	ISO 10545 - 4			≥35N/mm2
Deep Abrasion	ISO 10545 - 6			≤175 mm3
Surface Abrasion PEI ASTM C1027	ISO 10545 - 7	Visual Check	Manuf. to state Abrasion Class, Cycle Passed	Manuf. to state Abrasion Class, Cycle Passed
Crazing Test				Not Applicable for porcelain tiles
Frost Resistance		Visual Check		Required
Chemical Resistance (Low Cons.)		Visual Check		Manuf. to state
Chemical Resistance (Household/Swimming Pool)			Max Visible Change On Out Side	Max Visible Change On Cut Side
Stain Plesistance			Class 3 Min	Class 3 Min
Coefficient of Friction	ISO 10545 - 17			

Each different tiles series is produced to meet different performance requirements. For specific product technical performance, please request from WIFI sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

WIFI CERAMICS

No. 13-17, Building A16, International Ceramics and Sanitary Ware City, Jihua West Road, Nanzhuang Town, Chancheng District, Foshan City Guangdong Province, China.

+86-757-8252 5001

info@wificeremics.com

www.wificeramics.com