



OLGA

NATURALIS
STONE

欧加美岩系列



NATURALIS
MARBLE



OPUS
CEMENT




NATURALIS
STONE



OPUS
TERRAZZO



BOSCO
WOOD

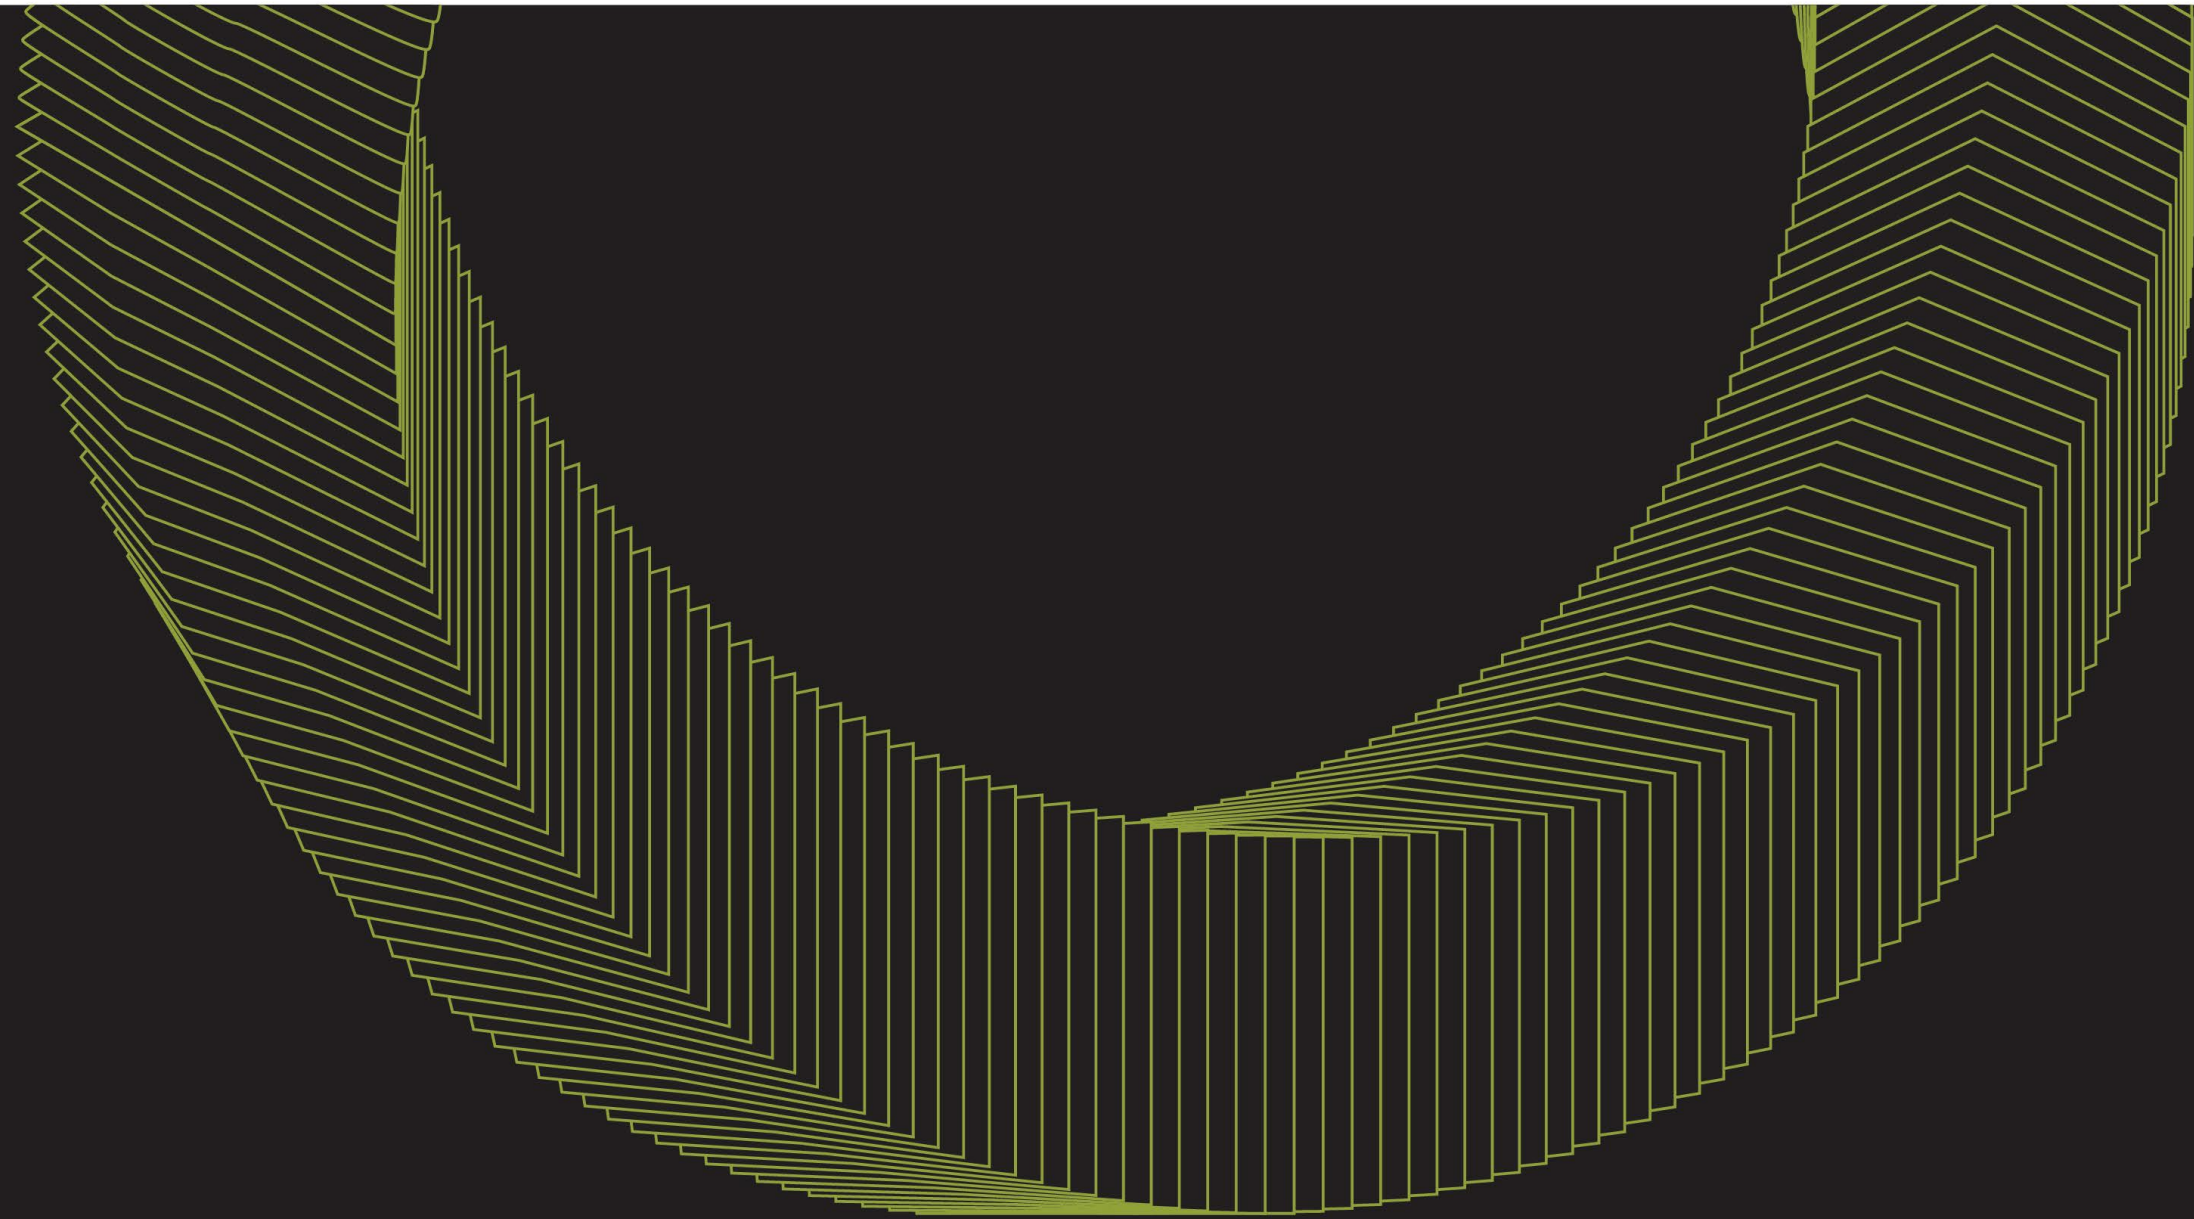

NATURALIS COLLECTIONS

Whether you are a true believer in the green movement or you're just passionate in bringing the beauty of nature into your home, there's no denying the appeal of natural materials in interior design.

Naturalis, a beautiful collection of porcelain tile designs inspired by natural stone. Gorgeous and extremely durable, stone-look tile is definitely a smart choice for floor and walls, and very easy to take care of as well.

OLGA 欧加美岩

Introducing OLGA, an exclusive porcelain series that showcases the elegance and quiet beauty of natural stone. With a subtle design that is both modern yet charmingly rare, OLGA evokes a wonderful ambience to any space, while introducing a soothing visual interest without sacrificing the overall serenity.

NATURALIS
COLLECTIONS

OLGA 欧加美岩

ASH

OLG600T

- 60x60
- 12 randomness
- P4 Techgrip surface





NATURALIS
COLLECTIONS

OLGA 欧加美岩

BEIGE

OLG602T

- 60x60
- 12 randomness
- P4 Techgrip surface






NATURALIS
COLLECTIONS

OLGA 欧加美岩

CINDER

OLG603T

- 60x60
- 12 randomness
- P4 Techgrip surface

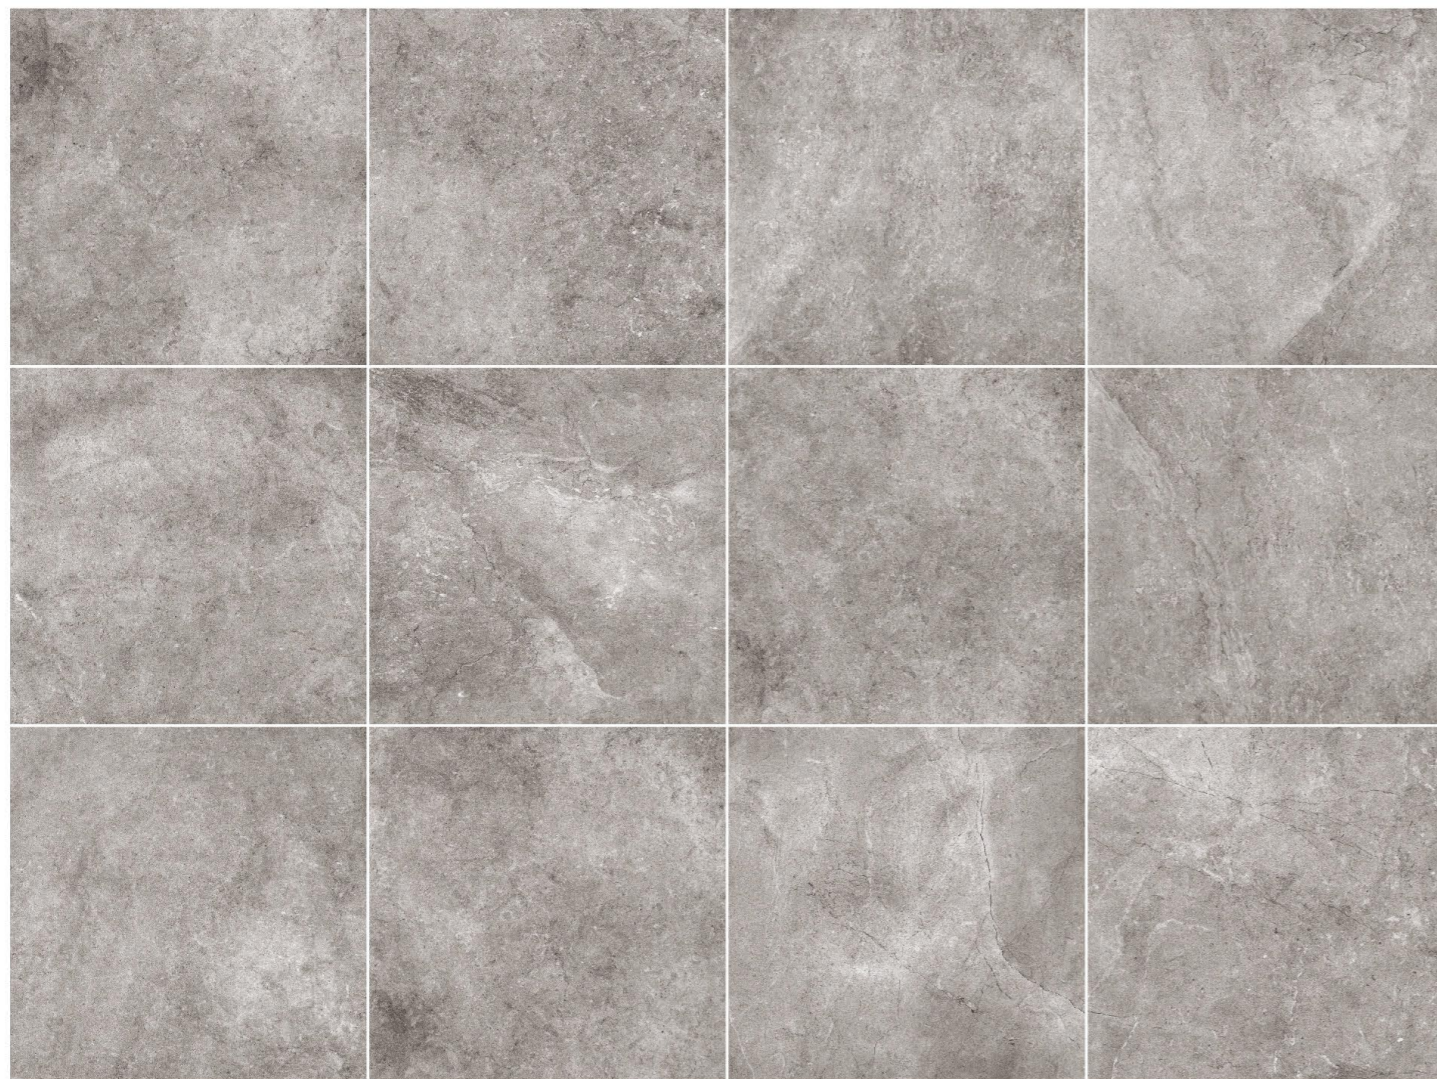



TECHNICAL SPECIFICATIONS

| DESCRIPTION | STANDARD TEST | MEASUREMENT UNIT | ISO STANDARD REQUIREMENT | WIFI |
|--|---|-------------------------|--|--|
| Length & Width | ISO 10545 - 2 | mm | ± 0.5% Max | ± 0.5% Max |
| Thickness | ISO 10545 - 2 | mm | ± 5.0% Max | ± 5.0% Max |
| Sides Straightness | ISO 10545 - 2 | mm | ± 0.5% Max | ± 0.5% Max |
| Rectangularity | ISO 10545 - 2 | mm | ± 0.6% Max | ± 0.6% Max |
| Flatness: a) Centre Curvature b) Edge Curvature c) Warpage | ISO 10545 - 2 ISO 10545 - 2 ISO 10545 - 2 | mm mm mm | ± 0.5% Max ± 0.5% Max ± 0.5% Max | ± 0.5% Max ± 0.5% Max ± 0.5% Max |
| Surface Quality | ISO 10545 - 2 | One major area of tiles | ≥ 95% free from visible defect | ≥ 95% free from visible defect |
| Water Absorption | ISO 10545 - 3 | Mass | ≤ 0.5% | 0.05% |
| Modulus of Rupture | ISO 10545 - 4 | N/mm ² | ≥ 35N/mm ² | ≥ 35N/mm ² |
| Deep Abrasion | ISO 10545 - 6 | mm ³ | ≤ 175 mm ³ | ≤ 175 mm ³ |
| Surface Abrasion PEI ASTM C1027 | ISO 10545 - 7 | Visual Check | Manuf. to state Abrasion Class, Cycle Passed | Manuf. to state Abrasion Class, Cycle Passed |
| Crazing Test | ISO 10545 - 11 | Visual Check | Not Applicable for porcelain tiles | Not Applicable for porcelain tiles |
| Frost Resistance | ISO 10545 - 12 | Visual Check | Required | Required |
| Chemical Resistance (Low Cons.) | ISO 10545 - 13 | Visual Check | Manuf. to state | Manuf. to state |
| Chemical Resistance (Household/Swimming Pool) | ISO 10545 - 13 | Visual Check | Max Visible Change On Cut Side | Max Visible Change On Cut Side |
| Stain Resistance | ISO 10545 - 14 | Visual Check | Class 3 Min | Class 3 Min |
| Coefficient of Friction | ISO 10545 - 17 | Manuf. to state | Manuf. to state | Manuf. to state |

Each different tiles series is produced to meet different performance requirements. For specific product technical performance, please request from **WIFI** sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

WIFI CERAMICS

No. 13-17, Building A16,
International Ceramics and Sanitary Ware City,
Jihua West Road, Nanzhuang Town,
Chancheng District, Foshan City
Guangdong Province, China.

+86-757-8252 5001
info@wificeramics.com
www.wificeramics.com