



**GALAXY**

NATURALIS  
STONE

银河美岩系列



NATURALIS  
MARBLE



OPUS  
CEMENT




NATURALIS  
STONE



OPUS  
TERRAZZO



BOSCO  
WOOD

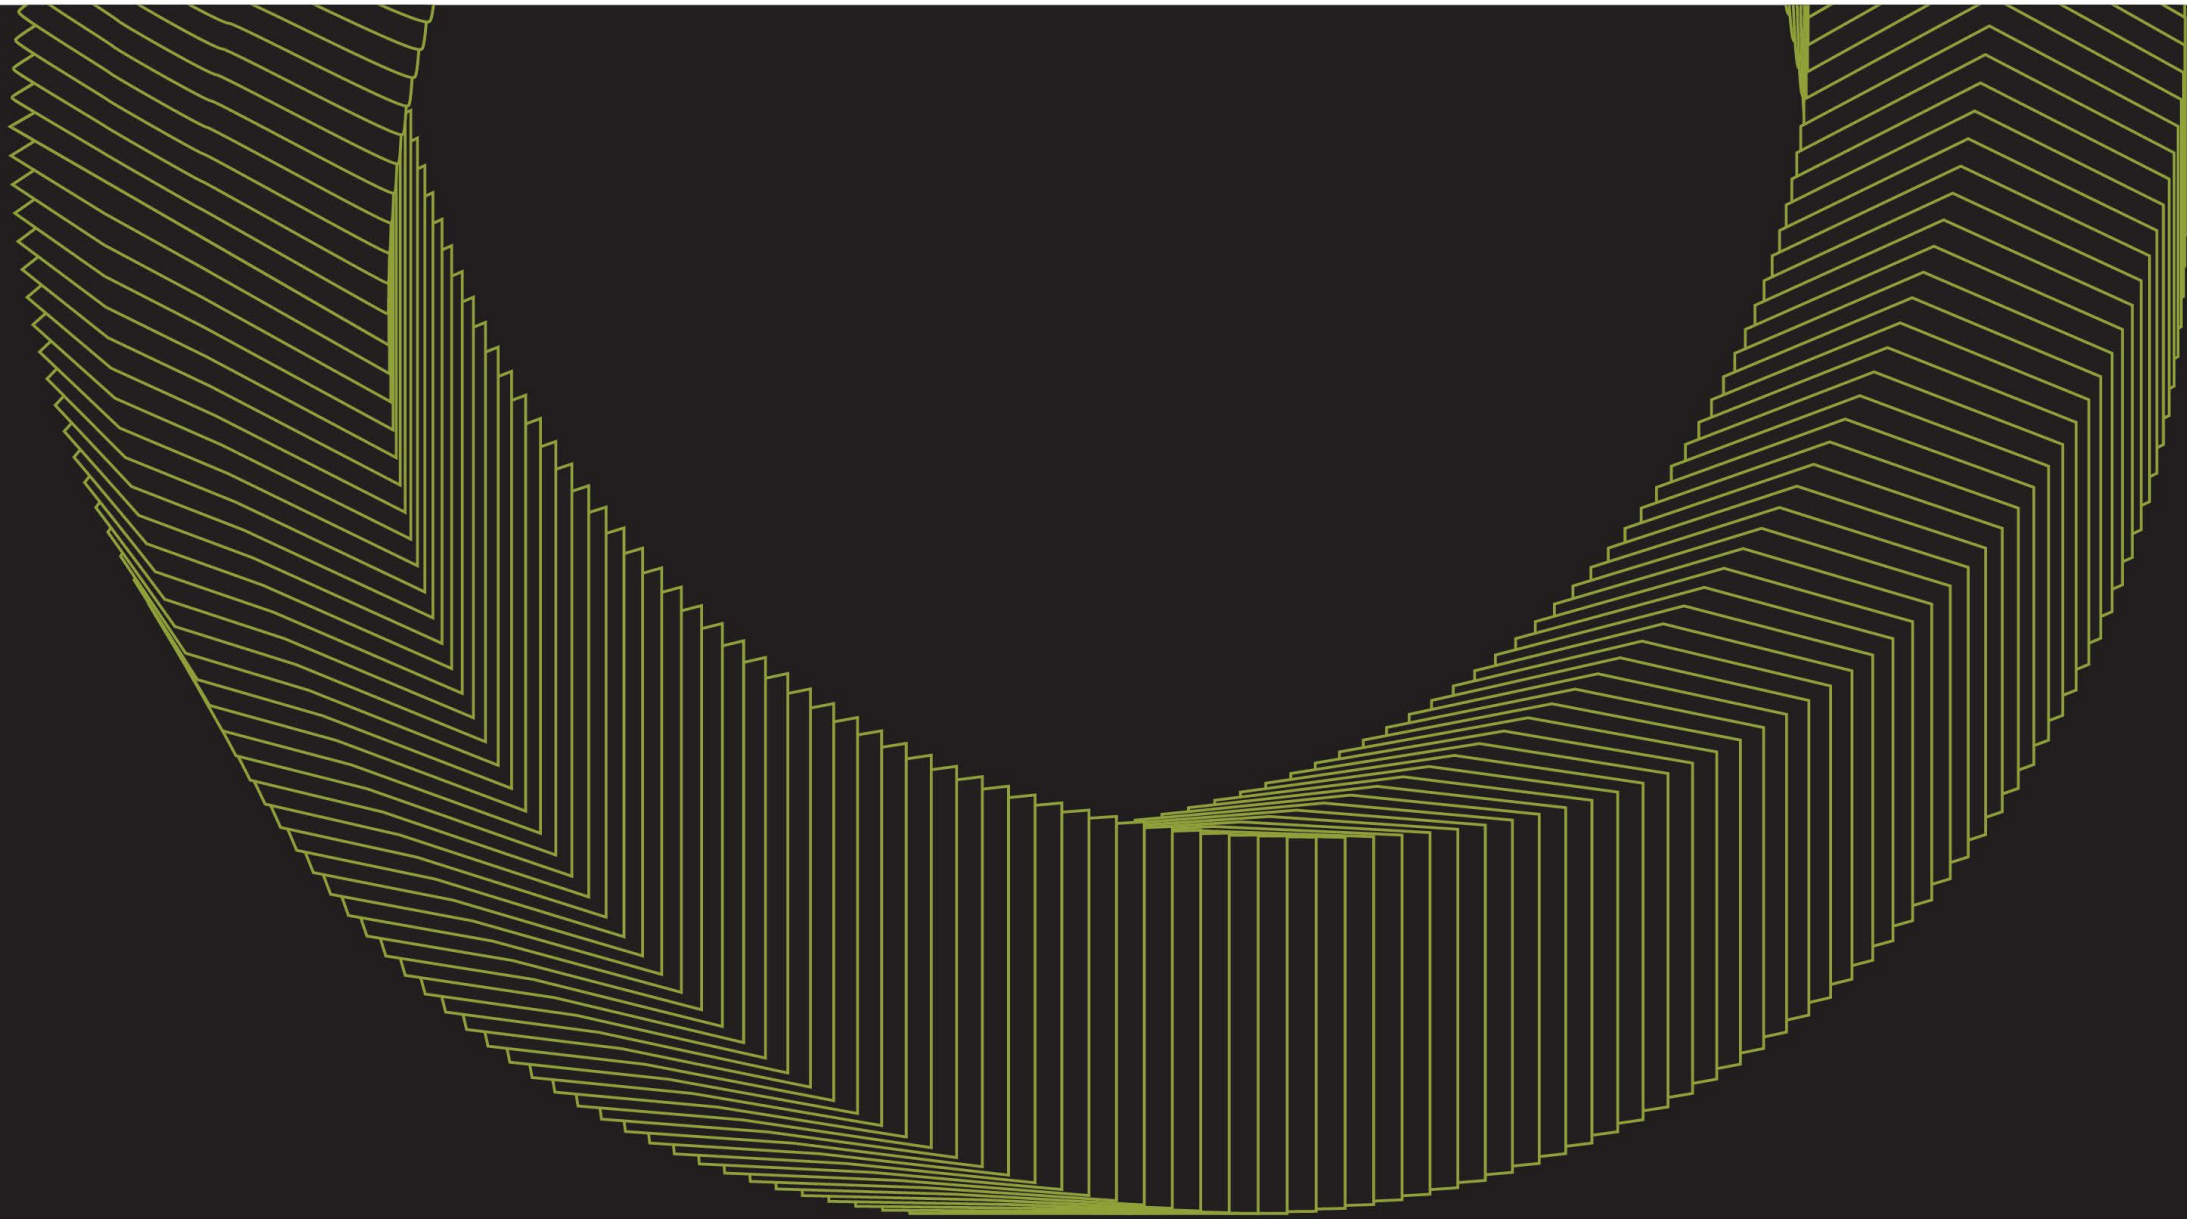

## NATURALIS COLLECTIONS

Whether you are a true believer in the green movement or you're just passionate in bringing the beauty of nature into your home, there's no denying the appeal of natural materials in interior design.

Naturalis, a beautiful collection of porcelain tile designs inspired by natural stone. Gorgeous and extremely durable, stone-look tile is definitely a smart choice for floor and walls, and very easy to take care of as well.

## GALAXY

银河美岩

Introducing GALAXY, an exclusive porcelain series that showcases the elegance and quiet beauty of natural stone. With a subtle design that is both modern yet charmingly rare, GALAXY evokes a wonderful ambience to any space, while introducing a soothing visual interest without sacrificing the overall serenity.



NATURALIS  
COLLECTIONS




# GALAXY

银河美岩

## IVORY

66GX023P4M

- 60x60
- 6 randomness
- P4 Techgrip

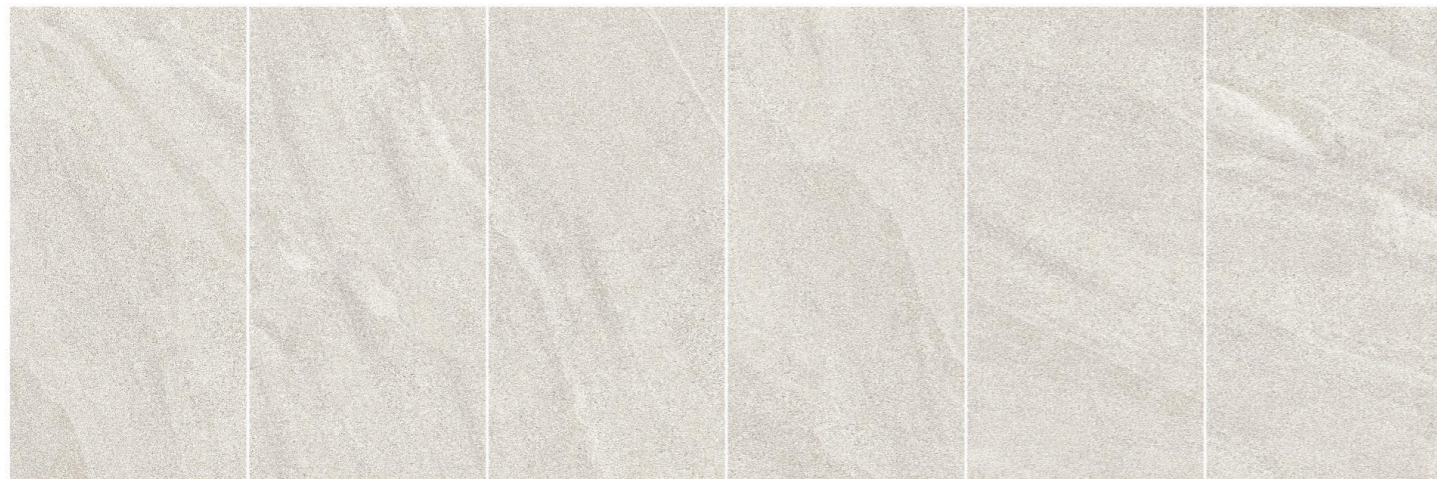

GX023P4M

- 60x120
- 6 randomness
- P4 Techgrip









NATURALIS  
COLLECTIONS





# GALAXY

银河美岩

## ASH

66GX024P4M

- 60x60
- 6 randomness
- P4 Techgrip

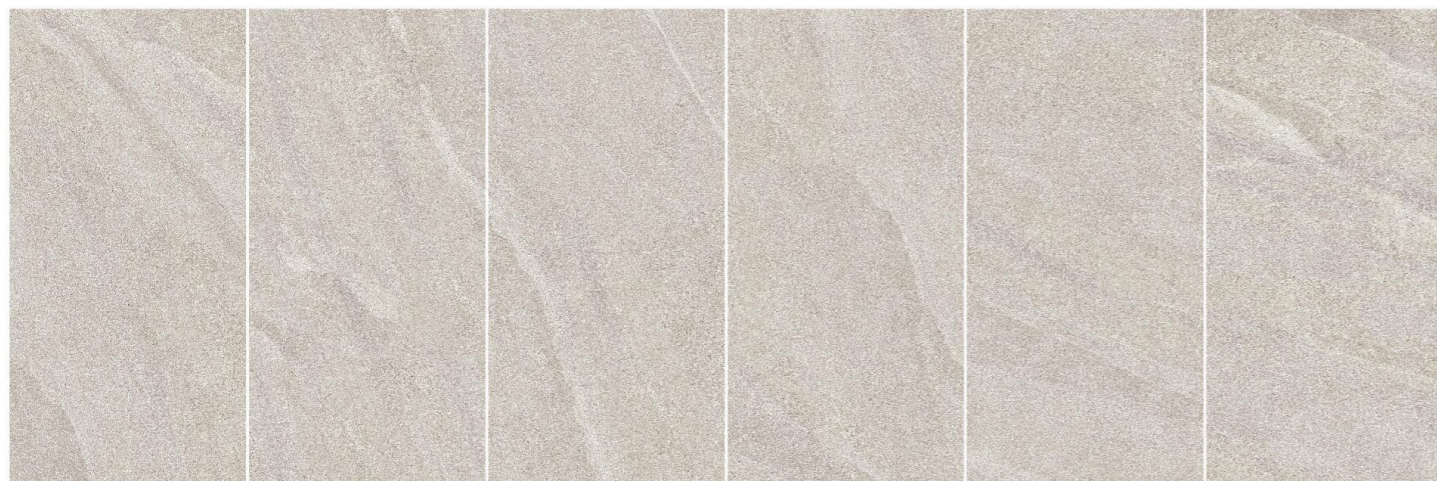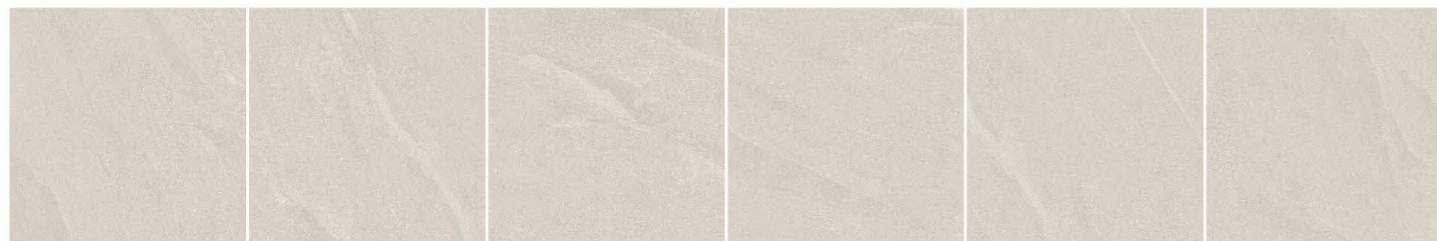

GX024P4M

- 60x120
- 6 randomness
- P4 Techgrip









NATURALIS  
COLLECTIONS




# GALAXY

银河美岩

## CINDER


66GX025P4M

- 60x60
- 6 randomness
- P4 Techgrip

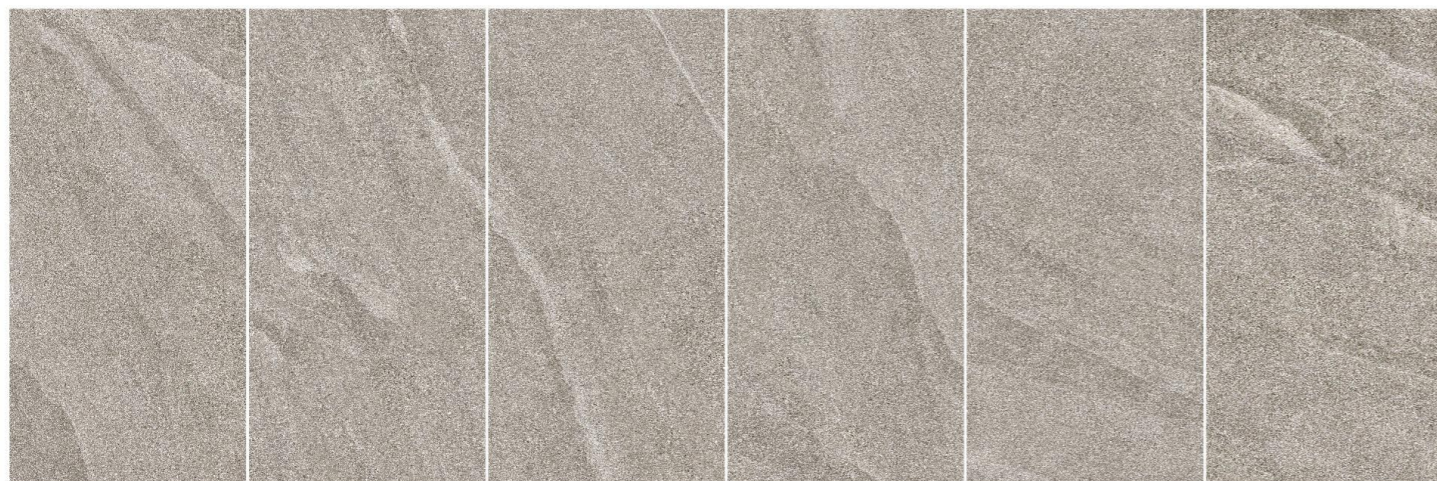

GX025P4M

- 60x120
- 6 randomness
- P4 Techgrip

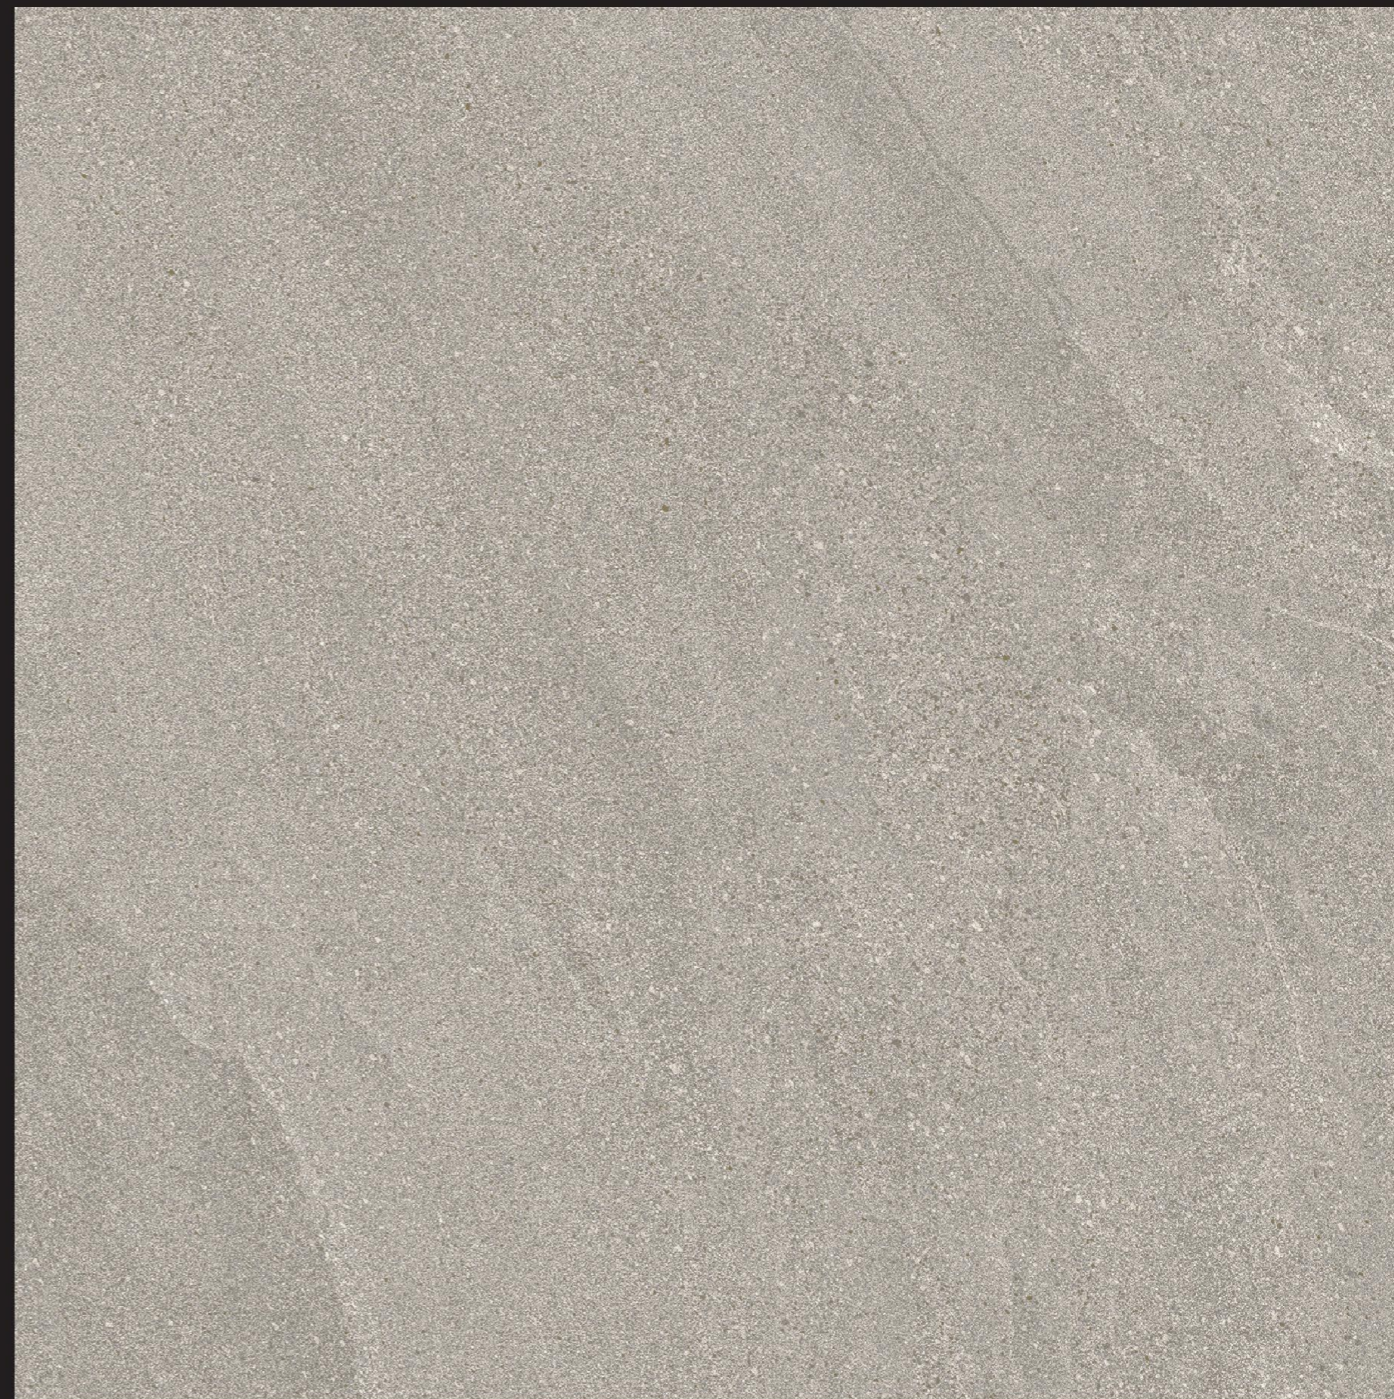







NATURALIS  
COLLECTIONS




# GALAXY

银河美岩

## COAL

66GX026P4M

- 60x60
- 6 randomness
- P4 Techgrip

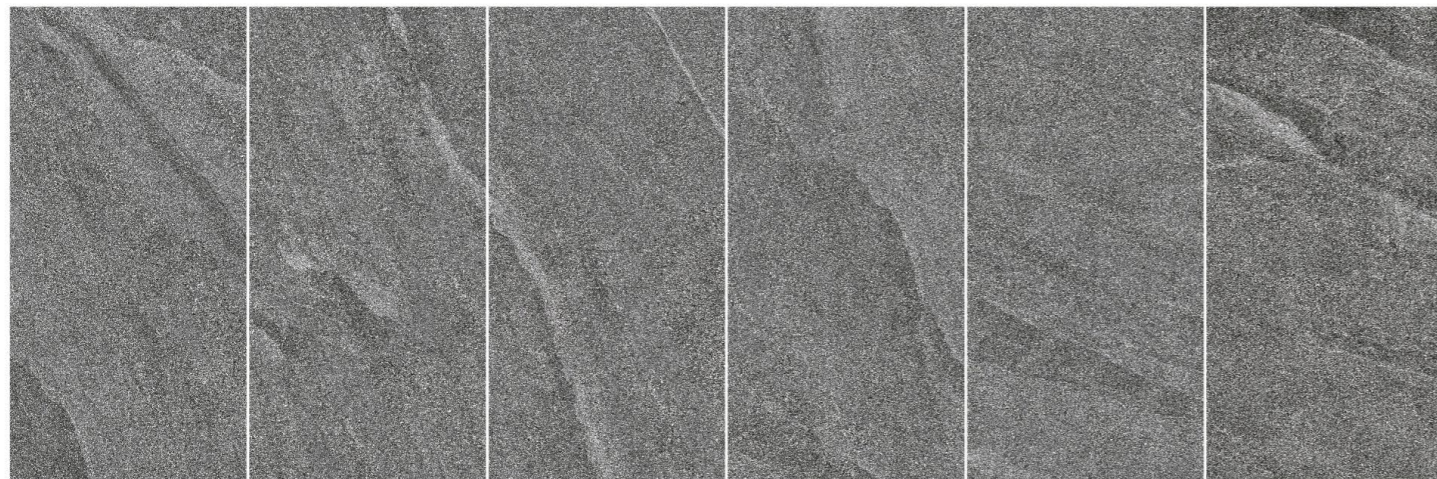

GX026P4M

- 60x120
- 6 randomness
- P4 Techgrip









## TECHNICAL SPECIFICATIONS

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	ISO STANDARD REQUIREMENT	WIFI
Length & Width	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Thickness	ISO 10545 - 2	mm	± 5.0% Max	± 5.0% Max
Sides Straightness	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Rectangularity	ISO 10545 - 2	mm	± 0.6% Max	± 0.6% Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545 - 2 ISO 10545 - 2 ISO 10545 - 2	mm mm mm	± 0.5% Max ± 0.5% Max ± 0.5% Max	± 0.5% Max ± 0.5% Max ± 0.5% Max
Surface Quality	ISO 10545 - 2	One major area of tiles	≥ 95% free from visible defect	≥ 95% free from visible defect
Water Absorption	ISO 10545 - 3	Mass	≤ 0.5%	0.05%
Modulus of Rupture	ISO 10545 - 4	N/mm <sup>2</sup>	≥ 35N/mm <sup>2</sup>	≥ 35N/mm <sup>2</sup>
Deep Abrasion	ISO 10545 - 6	mm <sup>3</sup>	≤ 175 mm <sup>3</sup>	≤ 175 mm <sup>3</sup>
Surface Abrasion PEI ASTM C1027	ISO 10545 - 7	Visual Check	Manuf. to state Abrasion Class, Cycle Passed	Manuf. to state Abrasion Class, Cycle Passed
Crazing Test	ISO 10545 - 11	Visual Check	Not Applicable for porcelain tiles	Not Applicable for porcelain tiles
Frost Resistance	ISO 10545 - 12	Visual Check	Required	Required
Chemical Resistance (Low Cons.)	ISO 10545 - 13	Visual Check	Manuf. to state	Manuf. to state
Chemical Resistance (Household/Swimming Pool)	ISO 10545 - 13	Visual Check	Max Visible Change On Cut Side	Max Visible Change On Cut Side
Stain Resistance	ISO 10545 - 14	Visual Check	Class 3 Min	Class 3 Min
Coefficient of Friction	ISO 10545 - 17	Manuf. to state	Manuf. to state	Manuf. to state

Each different tiles series is produced to meet different performance requirements. For specific product technical performance, please request from **WIFI** sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

### WIFI CERAMICS

No. 13-17, Building A16,  
International Ceramics and Sanitary Ware City,  
Jihua West Road, Nanzhuang Town,  
Chancheng District, Foshan City  
Guangdong Province, China.

+86-757-8252 5001  
info@wificeramics.com  
www.wificeramics.com