

OPUS
COLLECTION

特拉弗洛系列
TERRAFLO
SERIES





TERRAZZO

natural stone cementitious water

CHIPS + BINDER + POLISHING

OPUS COLLECTIONS

By definition, an Opus is a created work by man, usually of an artistic kind. It is creative and beautiful - a definite work of art to the eye of the beholder.

OPUS, a unique glazed porcelain tile collection that offers designs inspired by man-made materials in the architecture world. Opus tiles provides infinite possibilities to the discerning when it comes to beautiful, modern spaces. Its range of versatile, neutral hues also aims to delight the senses.



GT126026P
600*1200

- MIRCO GRIP + SOFT BRUSH
超細干粒+刷拋
- 5 RANDOM FACES 版面

WIFI CERAMICHE
唯梵
特
拉
弗
洛
系
列
TERRAFLO
S
E
R
I
E
S




WIFI
CERAMICHE
唯梵

特拉弗洛系列
TERRAFLO
SERIES

GT126026P
600*1200

■ MIRCO GRIP + SOFT BRUSH
超細干粒+刷拋

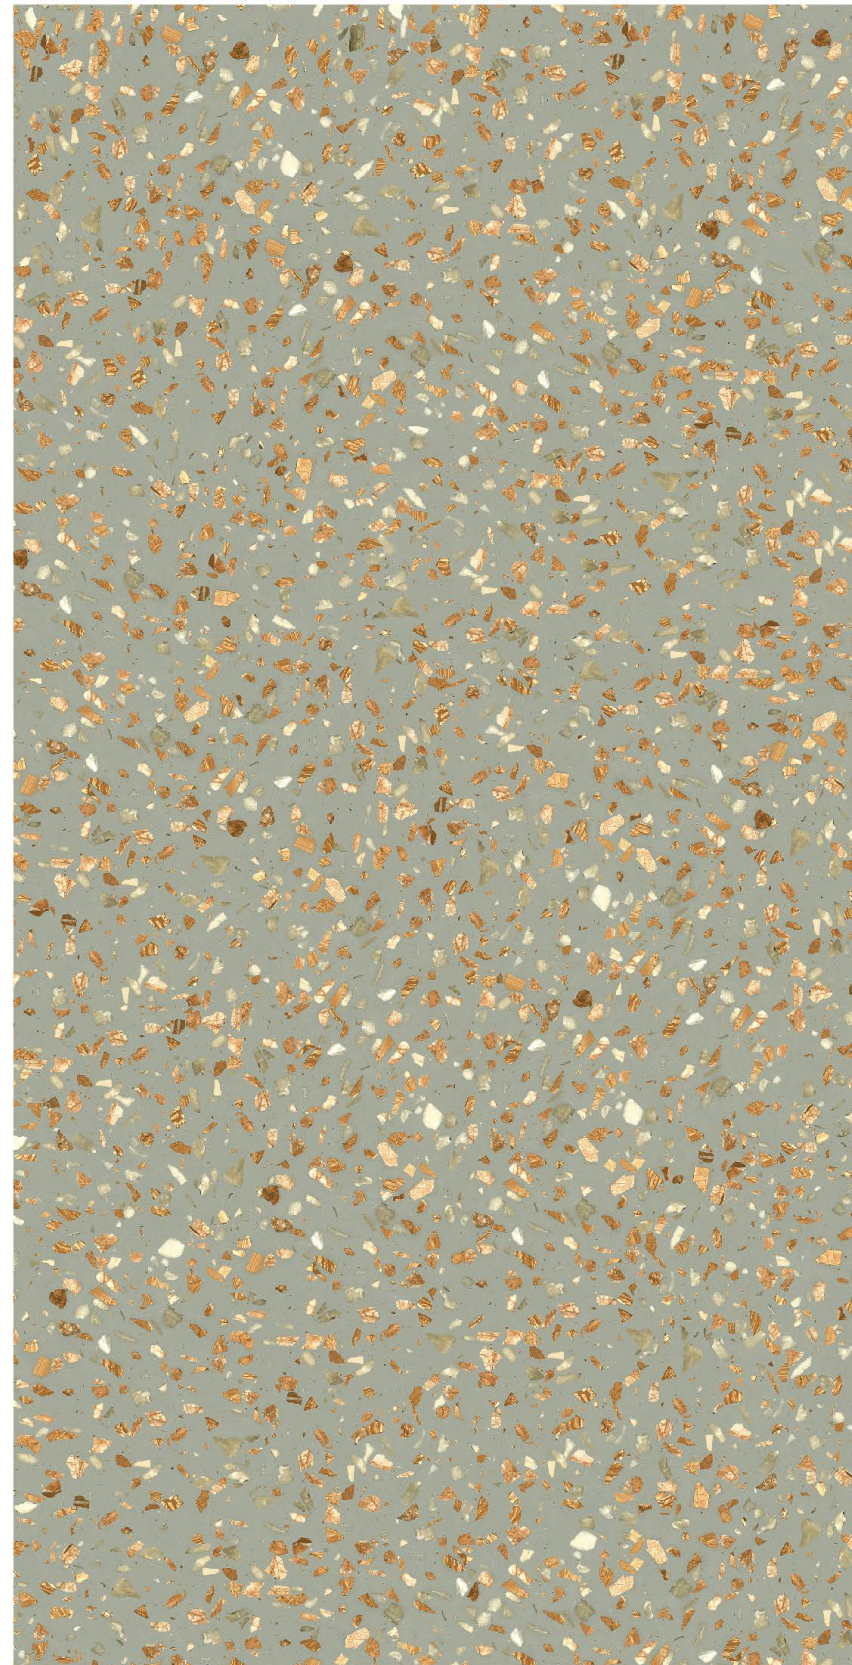

MR12603HP
600*1200

- MIRCO GRIP + SOFT BRUSH
超細干粒+刷拋
- 4 RANDOM FACES 版面

WIFI
CERAMICHE
唯梵

特
拉
弗
洛
系
列

TERRAFLO
SERIES



WIFI
CERAMICHE
唯梵

特拉弗洛系列
TERRAFLO
SERIES

MR12603HP
600*1200

■ MIRCO GRIP + SOFT BRUSH
超細干粒+刷拋



MR12605HP
600*1200

- MIRCO GRIP + SOFT BRUSH
超細干粒+刷拋
- 4 RANDOM FACES 版面



特拉弗洛系列
TERRAFLO
SERIES




WIFI
CERAMICHE
唯梵

特拉弗洛系列
TERRAFLO
SERIES

MR12605HP
600*1200

■ MIRCO GRIP + SOFT BRUSH
超細干粒+刷地

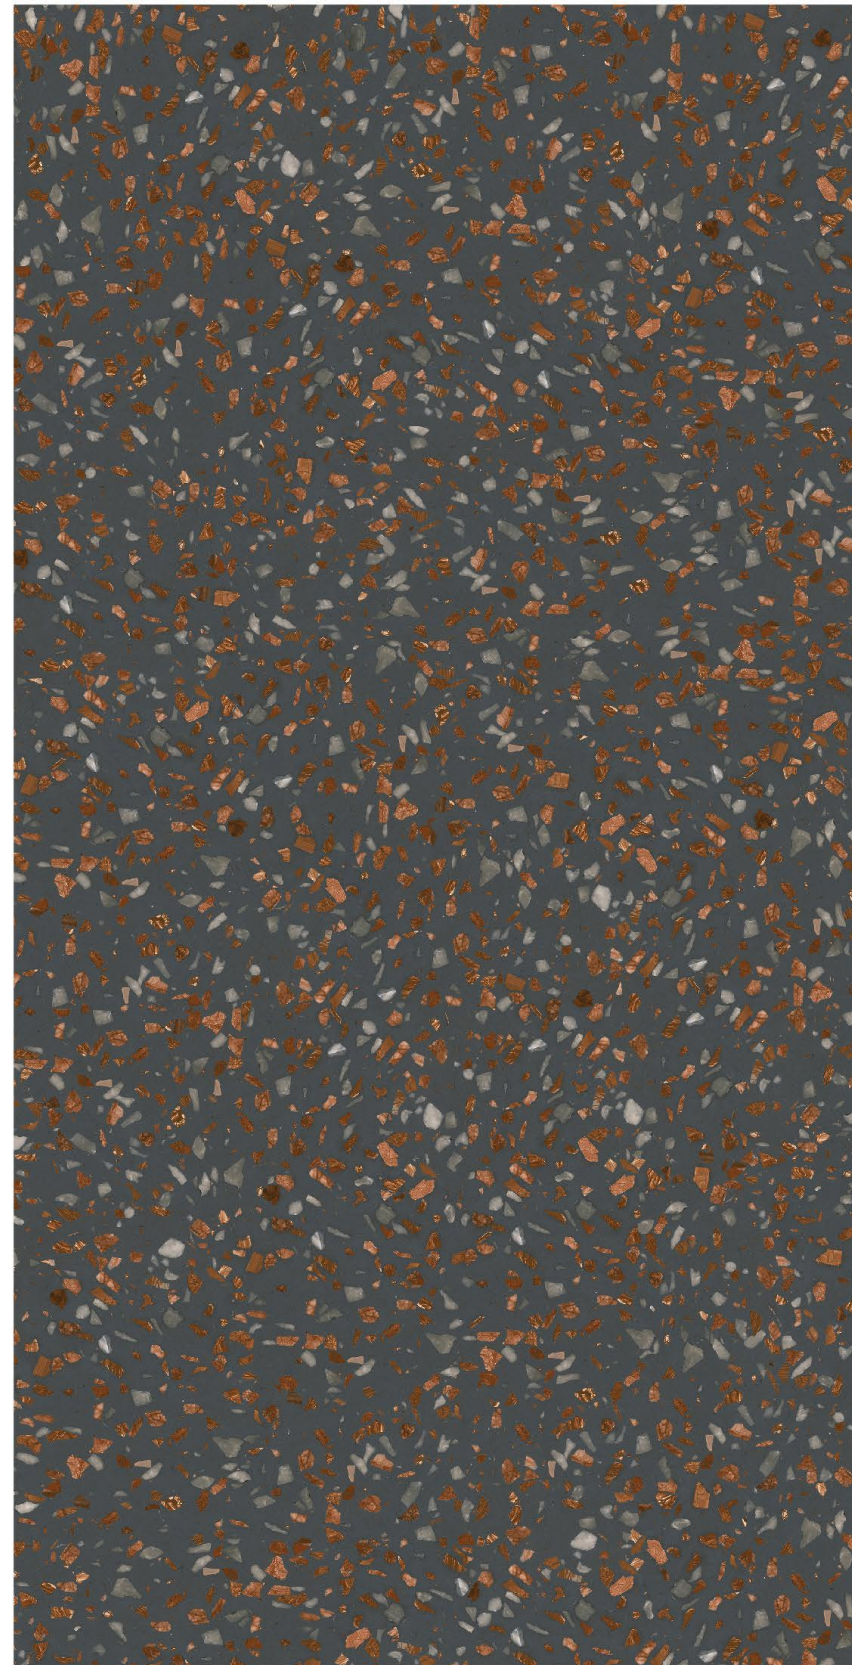

特拉弗洛系列
TERRAFLO
SERIES

MR12612HP
600*1200

- MIRCO GRIP + SOFT BRUSH
超細干粒+刷拋
- 4 RANDOM FACES 版面



WIFI
CERAMICHE
唯梵

特拉弗洛系列
TERRAFLO
SERIES

MR12612HP
600*1200

■ MIRCO GRIP + SOFT BRUSH
超細干粒+刷地

TECHNICAL SPECIFICATIONS

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	ISO STANDARD REQUIREMENT	GARDEN OAK
Length & Width	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Thickness	ISO 10545 - 2	mm	± 5.0% Max	± 5.0% Max
Sides Straightness	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Rectangularity	ISO 10545 - 2	mm	± 0.6% Max	± 0.6% Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545 - 2 ISO 10545 - 2 ISO 10545 - 2	mm mm mm	± 0.5% Max ± 0.5% Max ± 0.5% Max	± 0.5% Max ± 0.5% Max ± 0.5% Max
Surface Quality	ISO 10545 - 2	One major area of tiles	≥ 95% free from visible defect	≥ 95% free from visible defect
Water Absorption	ISO 10545 - 3	Mass	≤ 0.5%	0.05%
Modulus of Rupture	ISO 10545 - 4	N/mm ²	≥ 35N/mm ²	≥ 35N/mm ²
Deep Abrasion	ISO 10545 - 6	mm ³	≤ 175 mm ³	≤ 175 mm ³
Surface Abrasion PEI ASTM C1027	ISO 10545 - 7	Visual Check	Manuf. to state Abrasion Class, Cycle Passed	Manuf. to state Abrasion Class, Cycle Passed
Crazing Test	ISO 10545 - 11	Visual Check	Not Applicable for porcelain tiles	Not Applicable for porcelain tiles
Frost Resistance	ISO 10545 - 12	Visual Check	Required	Required
Chemical Resistance (Low Cons.)	ISO 10545 - 13	Visual Check	Manuf. to state	Manuf. to state
Chemical Resistance (Household/Swimming Pool)	ISO 10545 - 13	Visual Check	Max Visible Change On Cut Side	Max Visible Change On Cut Side
Stain Resistance	ISO 10545 - 14	Visual Check	Class 3 Min	Class 3 Min
Coefficient of Friction	ISO 10545 - 17	Manuf. to state	Manuf. to state	Manuf. to state

Each different tiles series is produced to meet different performance requirements. For specific product technical performance, please request from sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.