



RUSTON

NATURALIS
COLLECTIONS



NATURALIS

COLLECTIONS

WHETHER YOU ARE A TRUE BELIEVER IN THE GREEN MOVEMENT OR YOU'RE JUST PASSIONATE IN BRINGING THE BEAUTY OF NATURE INTO YOUR HOME, THERE'S NO DENYING THE APPEAL OF NATURAL MATERIALS IN INTERIOR DESIGN.

NATURALIS, A BEAUTIFUL COLLECTION OF PORCELAIN TILE DESIGNS INSPIRED BY NATURAL STONE. GORGEOUS AND EXTREMELY DURABLE, STONE-LOOK TILE IS DEFINITELY A SMART CHOICE FOR FLOORS AND WALLS, AND VERY EASY TO TAKE CARE OF AS WELL. WITH ITS FINE VARIETY OF MODERN DESIGNS AND SIZES, NATURALIS IS SURE TO ADD AN ELEGANT TOUCH TO ANY DÉCOR SCHEME.

BY WIFI CERAMICHE

BEIGE

RUS612001MGB
Lappato On Natural Surface



60x120
6 RANDOMNESS

75x150
6 RANDOMNESS



60x60
12 RANDOMNESS

(customized for project only)

ASH

RUS612002MGB
Lappato On Natural Surface



60x120
6 RANDOMNESS

75x150
6 RANDOMNESS



60x60
12 RANDOMNESS

(customized for project only)


CINDER

RUS612003MGB
Lappato On Natural Surface



60x120
6 RANDOMNESS

75x150
6 RANDOMNESS

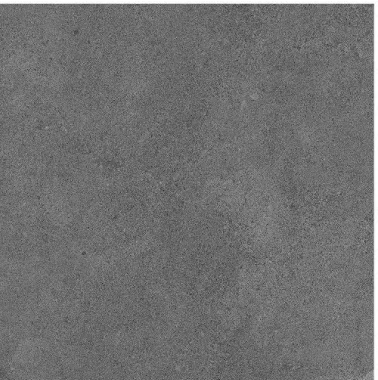

60x60
12 RANDOMNESS

(customized for project only)

COAL

RUS612004MGB
Lappato On Natural Surface



60x120
6 RANDOMNESS

75x150
6 RANDOMNESS



60x60
12 RANDOMNESS

(customized for project only)



NATURALIS
COLLECTIONS

BEIGE

■ RUS612001MGB
Lappato On Natural Surface

Bring the look of indulgence into your interiors. Beige has the air of classic Italian charm with a captivating and modern twist that highlights the organic speckled pattern of stone.





ASH

■ RUS612002MGB
Lappato On Natural Surface

Ash offers an urban vibe yet it remains soothing to the eye. It is neither loud nor dramatic but has an understated grey colour that suits most interior schemes.






CINDER

■ RUS612003MGB
Lappato On Natural Surface

Renew your space with the masculine appeal of Cinder. Its modern, earthy hue is sought-after not only for patios and bathrooms, it can be used for hotel lobbies and offices.

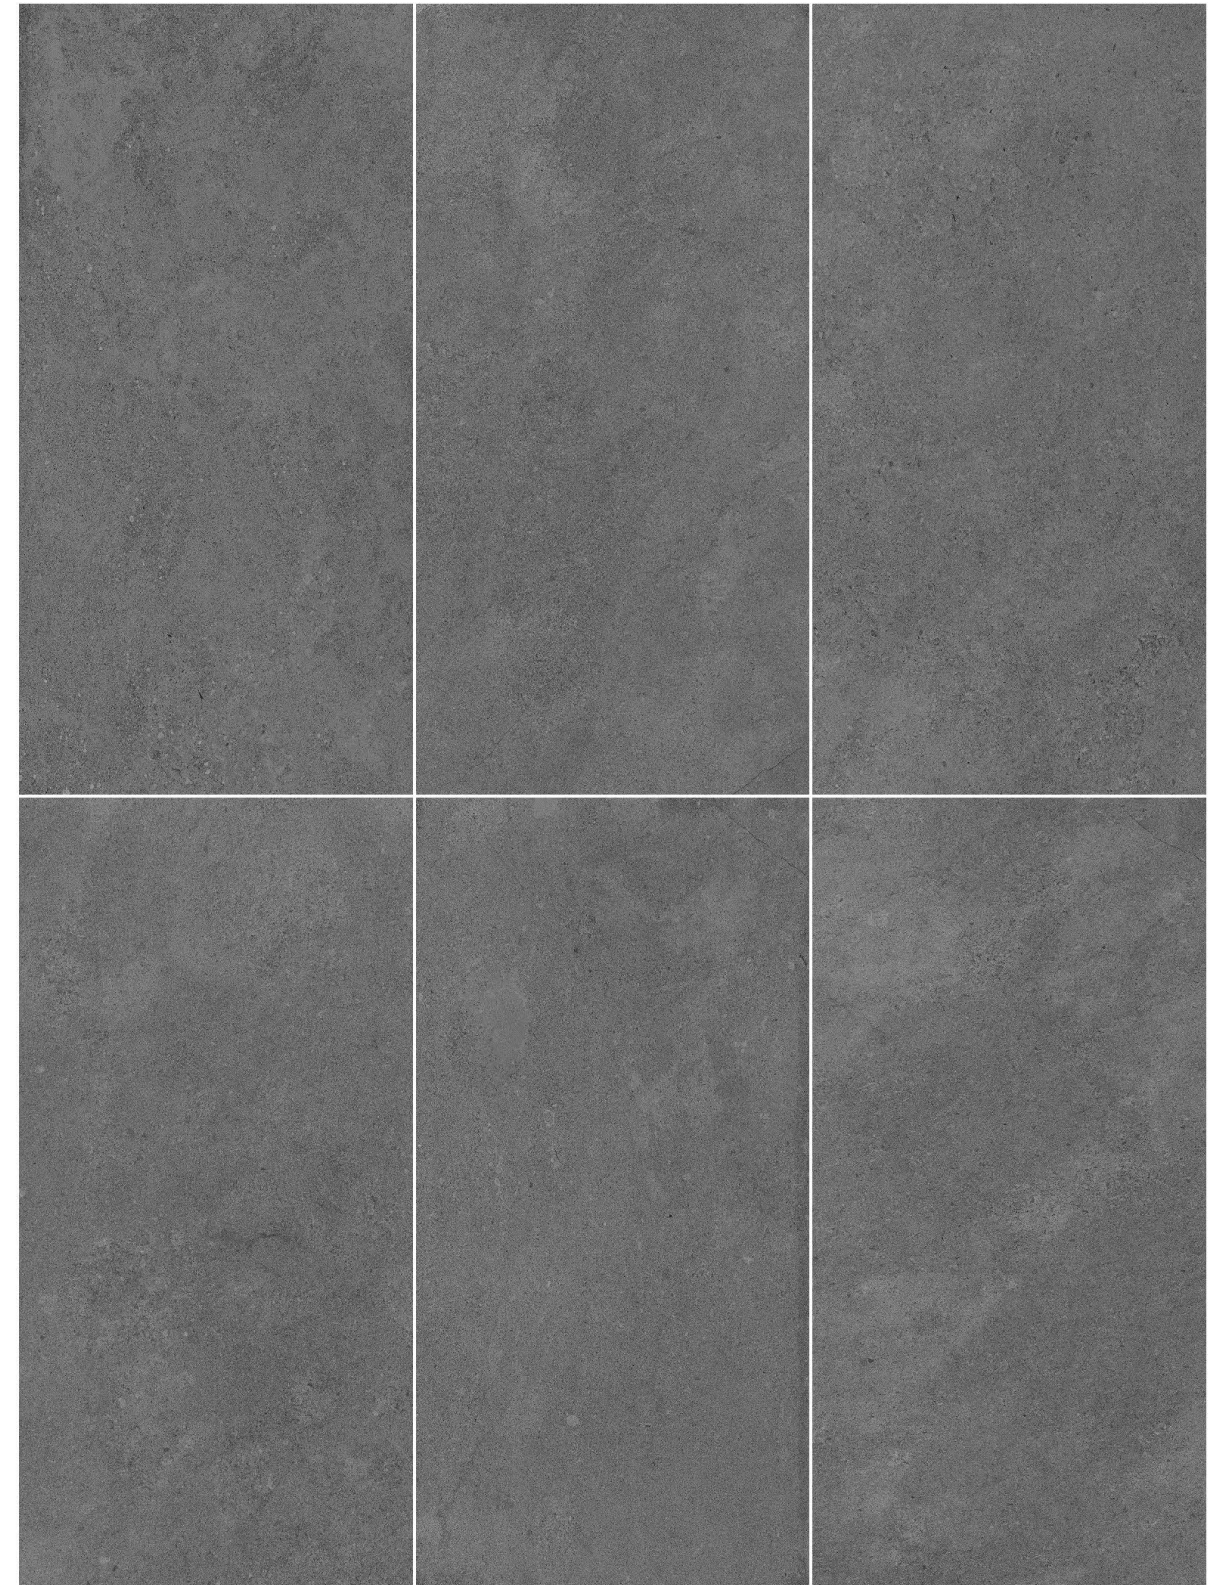




NATURALIS
COLLECTIONS

COAL


■ RUS612004MGB
Lappato On Natural Surface

Rich in detail and colour, Coal is designed to give your space the sophistication, drama and style of luxurious stone with the durability and versatility of porcelain tile.

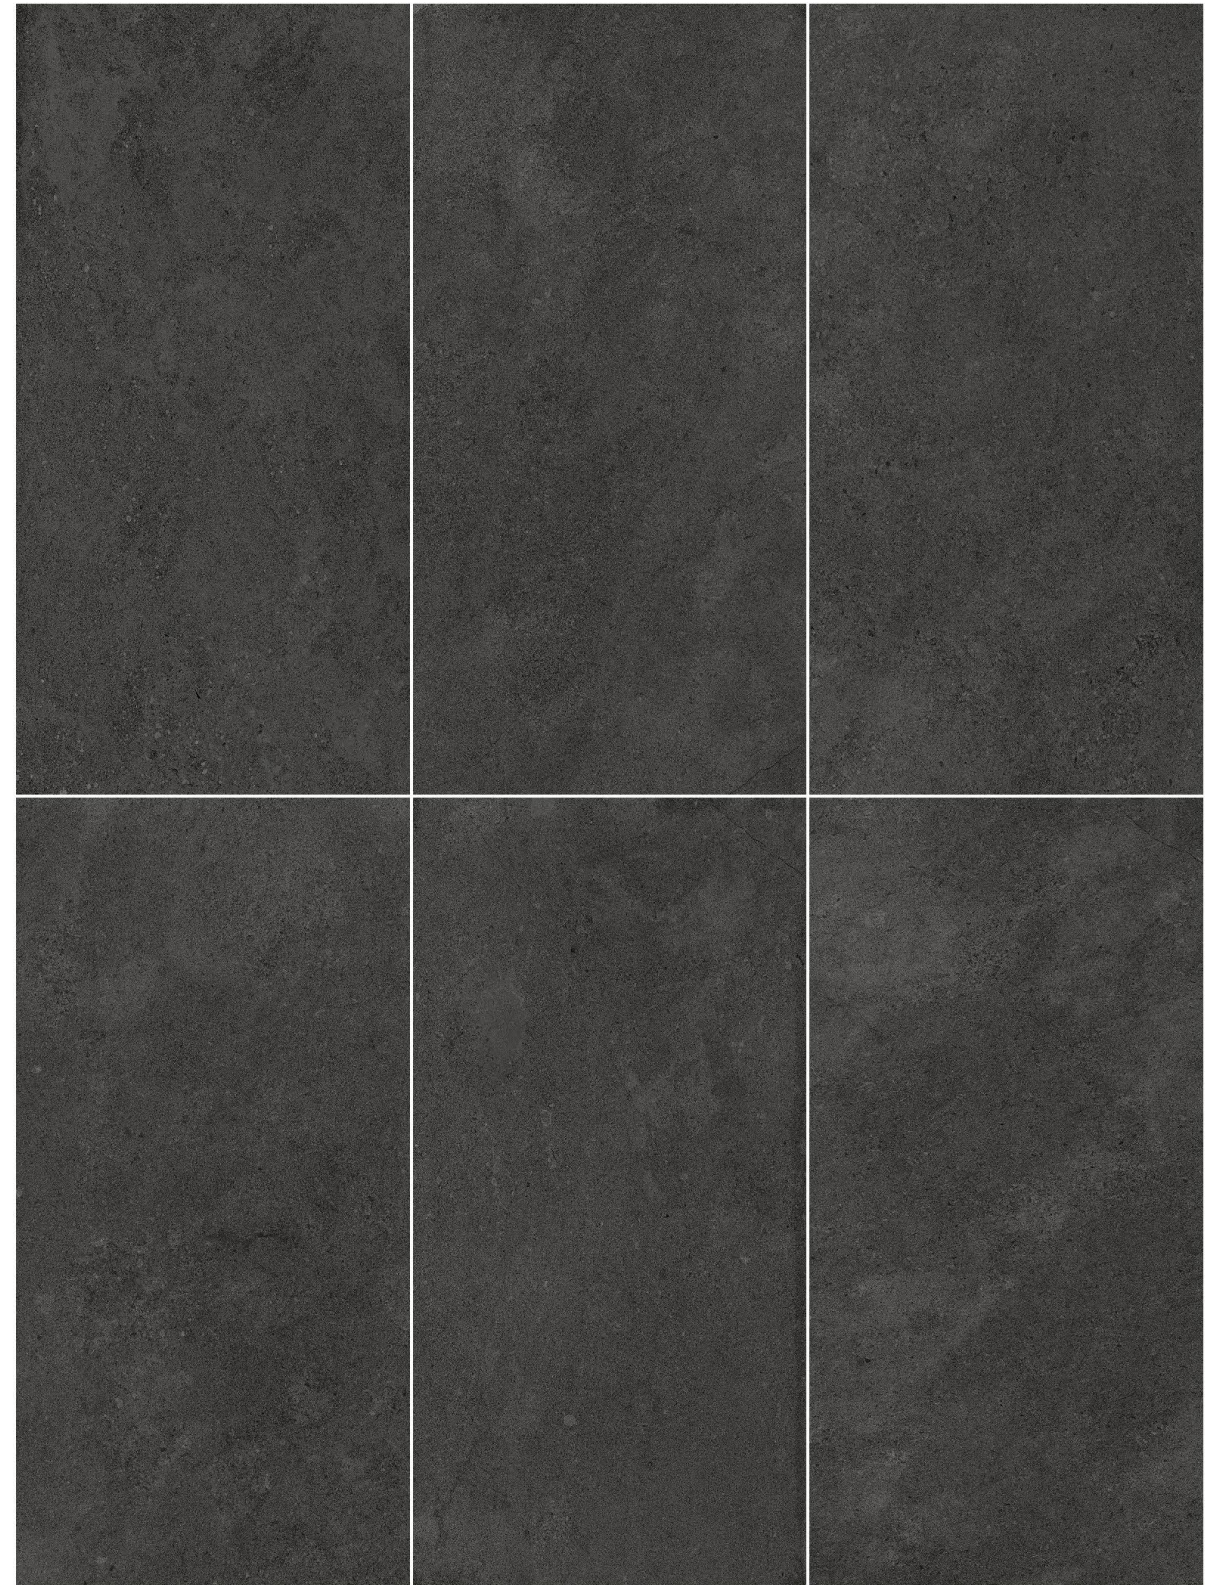

INSTALLATION TIPS


- 01 Inspect all product prior to installation for any visible defects or unacceptable colour/shade variation. Claims are not accepted after installation.
- 02 A 1/4" square-notched trowel is suggested for applying the thin-set.
- 03 Before grouting, allow the mortar base to dry for 24 to 48 hours.
- 04 The tiles can be cleaned with clear water and/or a neutral liquid cleaner. Apply the cleaning solution to the properly installed tile using a cloth mop or non-abrasive towel. Follow the application with a clear water rinse and wipe dry to prevent film formation.
- 05 Sealing the tile is not recommended, and acid cleaning the tile may result in substantial harm to the product; therefore if either of these applications are performed it will specifically void the warranty.
- 06 INSTALLATION OF RECTANGULAR TILES:
Staggered space should be kept within 10cm to 15cm to compensate for the warpage of rectangular tiles.



WRONG




RIGHT



RIGHT

- 07 Tile leveling system to prevent tile lippage is important, especially when dealing with large format tiles. Due to its design, a tile leveling system interlocks the tiles, ensuring that the surface remains smooth and flat while the thinset dries.



TECHINICAL SPECIFICATIONS

DESCRIPTION	STANDARD TEST	MEASUREMENT UNIT	ISO STANDARD REQUIREMENT	WIFI
Length & Width	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Thickness	ISO 10545 - 2	mm	± 5.0% Max	± 5.0% Max
Sides Straightness	ISO 10545 - 2	mm	± 0.5% Max	± 0.5% Max
Rectangularity	ISO 10545 - 2	mm	± 0.6% Max	± 0.6% Max
Flatness: a) Centre Curvature b) Edge Curvature c) Warpage	ISO 10545 - 2 ISO 10545 - 2 ISO 10545 - 2	mm mm mm	± 0.5% Max ± 0.5% Max ± 0.5% Max	± 0.5% Max ± 0.5% Max ± 0.5% Max
Surface Quality	ISO 10545 - 2	One major area of tiles	≥ 95% free from visible defect	≥ 95% free from visible defect
Water Absorption	ISO 10545 - 3	Mass	≤ 0.5%	0.05%
Modulus of Rupture	ISO 10545 - 4	N/mm2	≥ 35N/mm2	≥ 35N/mm2
Deep Abrasion	ISO 10545 - 6	mm3	≤ 175 mm3	≤ 175 mm3
Surface Abrasion PEI ASTM C1027	ISO 10545 - 7	Visual Check	Manuf. to state Abrasion Class, Cycle Passed	Manuf. to state Abrasion Class, Cycle Passed
Crazing Test	ISO 10545 - 11	Visual Check	Not Applicable for porcelain tiles	Not Applicable for porcelain tiles
Frost Resistance	ISO 10545 - 12	Visual Check	Required	Required
Chemical Resistance (Low Cons.)	ISO 10545 - 13	Visual Check	Manuf. to state	Manuf. to state
Chemical Resistance (Household/Swimming Pool)	ISO 10545 - 13	Visual Check	Max Visible Change On Out Side	Max Visible Change On Out Side
Stain Resistance	ISO 10545 - 14	Visual Check	Class 3 Min	Class 3 Min
Coefficient of Friction	ISO 10545 - 17	Manuf. to state	Manuf. to state	Manuf. to state

Each different tiles series is produced to meet different performance requirements. For specific product technical performance, please request from **WFI** sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.

WIFI CERAMICS

No. 13-17, Building A16,
International Ceramics and Sanitary Ware City,
Jihua West Road, Nanzhuang Town,
Chancheng District, Foshan City
Guangdong Province, China.

+86-757-8252 5001

info@wificeramics.com

www.wificeramics.com